




IGLU' H 75 cm



Ventilated under-floor cavities for civil and industrial buildings that are being built new or reconstructed. - Urban infrastructure structures: squares, sidewalks, sports facility.

• Creation of an intermediate slab or roofing for cavities used for ventilation and the passage of systems.

• Rooms used for humidity and temperature control: drying cells, cold rooms, greenhouses, storage rooms and cellars.


• Underground pipes for the passage of utilities. Inspectionable cavities and pits.


- By filling it in simply with expanded clay, it can be used to create roof-top gardens.
- Underground ducts for the dispersion of water and for drainage.
- Overhead sidewalks for passenger loading and unloading or the

creation of floating floors.

Levelling height.

Made of ALAPLEN® CP30



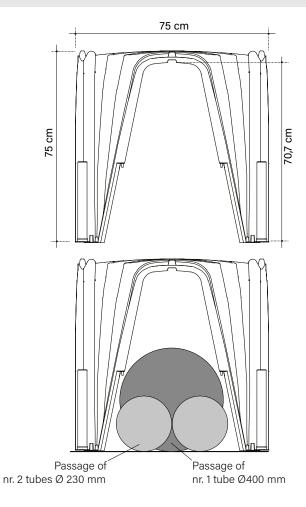

The images are only for examples. Recyclable material is allowed a size tolerance of \pm 1,5%.

0,117m³/m² Quantity (of concrete to the crown)

The volume may vary depending on the pouring condition and the tolerance of the material.

PRESSURES AT THE BOTTOM OF THE STRUCTURE

Loads ^[1] kN/m²	Slab cm	Mesh Ø mm Meshcm x cm	Thickness of the lean concrete cm	Pressure at pillar base ^[2] MPa
20	4	Ø 6/ 15 x 15	10 15 20	1,640 1,000 0,670
50	8	Ø 8/ 20 x 20	15 20 25	2,230 1,480 1,060
100	10	Ø 8/ 20 x 20	20 25 30	2,820 2,010 1,510

[1] Characteristic values

[2] Project values (Ultimate SLU Limit State - Coefficients A1)


The table expresses, starting from the various examples of overload and of thickness (to be given to the slab), the pressures that would be applied to the feet of the structure, in relation to the (eventual) thicknesses of the lean concrete. The overload hypotheses are indicated in table as an example; the actual load capacity is far superior.

To know the exact values or sizing as shown in the project, contact the technical department.

The Technical Office is available to provide planning support both in the preliminary and in the executive phase to determine the technical characteristics of the structures, the related construction costs and perform comparative analyzes with alternative technical solutions. Upon request, it is also possible to take advantage of technical assistance on site.

TECHNICAL DATA

Iglu'® H 75




Useful size*	cm	71 x 71
Height* H	cm	75
Quantity of concrete to the crown**	m³/m²	0,117
Average piece weight	kg	4,661
Pallet dimensions	cm	77 x 155 x 244
M ² pallet	m²/PAL	56
Pieces per pallet***	pz/PAL	112
Pallet weight***	kg/PAL	547

* Recyclable material is allowed a size tolerance of \pm 1,5%.

** The volume may vary depending on the pouring condition and the tolerance of the material. *** For production necessity the technical data can be change.


DRY ASSEMBLY METHOD

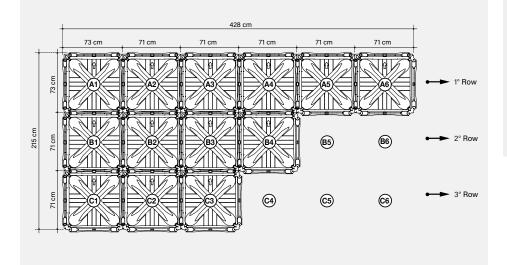

 \triangle To ensure a correct installation and perfectly created under-floor cavity please refer to the product's usage requirements.

Dry-stone time-exposure: 80 m²/h


TECHNICAL PACKING AND TRUCKING

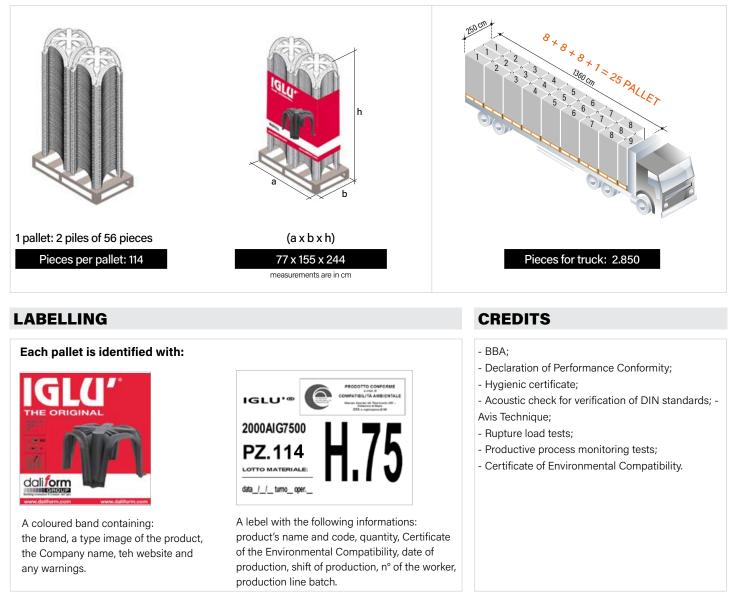

The product does not fear the weather and can be stored outside. Take the utmost care to prevent the product from being deformed or overstressed during the unloading, storage and assembly. In case of disposal the product is totally recyclable.

ACCESSORIES

L-PLAST CASTING STOP




Useful size	cm	205 x 74+5+10
Thickness	mm	0,60
Average piece weight	kg/pz	2,430
Quantity per package	ml	20

CASTING STOP PIBIStop



Useful size	cm	65+5+5+5+15
Thickness	mm	0,40
Average piece weight	kg/pz	0,470
Quantity per package	pz	25

PLASTIC EXTENSION



Useful size	cm	57 x 54 x 73
Average piece weight	kg/pz	3,776
Package size	cm	57 x 54 x 145
Quantity per package	pz	25
	cm	120 x 120 x 239
Pallet dimensions	pz/PAL	200
	kg/PAL	775



Tel. +39 0422 2083 - Fax +39 0422 800234 export@daliform.com - www.daliform.com Via Postumia Centro, 49 - 31040 Gorgo al Monticano (TV) - Italy



Certified Management System UNI EN ISO 9001, UNI EN ISO 14001, UNI EN ISO 45001, SA 8000