


IGLU'
smart




H 20 cm

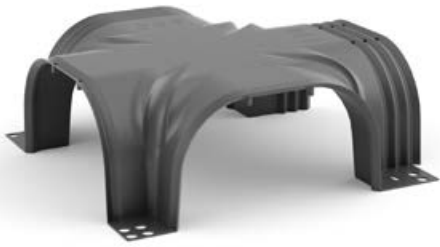

**Disposable, horizontally adjustable formworks
for creating ventilated cavities**

Ventilated under-floor cavities for civil and industrial buildings that are being built new or reconstructed. - Urban infrastructures: squares, sidewalks, sports facilities. - Creation of an intermediate slab or roofing for cavities used for ventilation and the passage of systems. - Rooms used for humidity and temperature control: drying cells, cold rooms, greenhouses, storage rooms and cellars. - Underground pipes for the passage of utilities. Inspectionable cavities and pits. - By filling it in simply with expanded clay, it can be used to create roof-top gardens. - Underground ducts for the dispersion of water and for drainage. - Overhead sidewalks for passenger loading and unloading or the creation of floating floors. - Levelling height.

Made in ALAPLEN® CP30

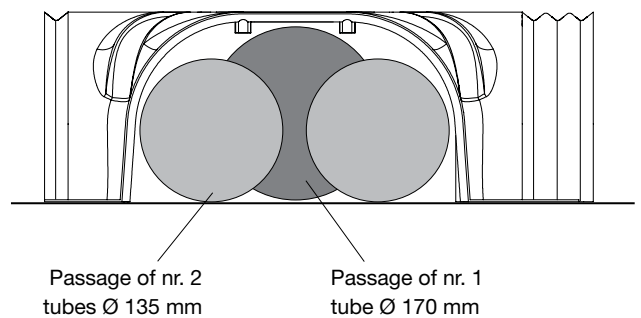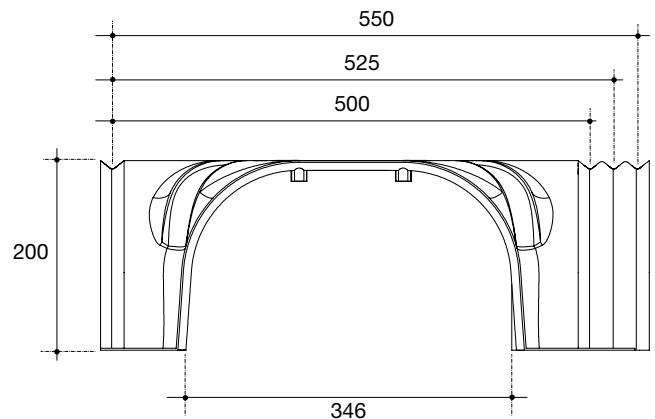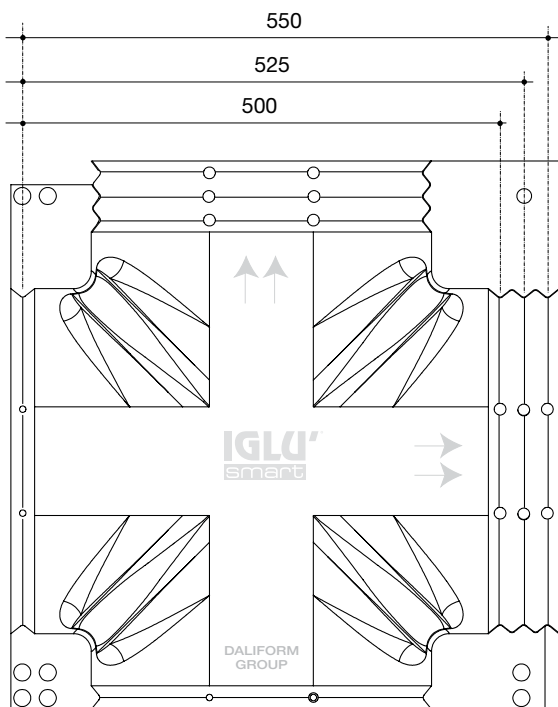

HYPOTHESIS OF SIZING FOR ULS


IGLU'® SMART h 20 cm

Formwork position	Function	Accidental load	Slab thickness	Slab reinforcement	Lean concrete thickness	Max. pressure on lean concrete	Max. pressure on soil
cm		kg/m ²	cm		cm	kg/m ²	kg/m ²
55 x 55	Residential building	500	4	Ø5 / 20x20	5	0,55	0,26
	Public and commercial building	1.000	5	Ø6 / 20x20	5	0,97	0,46
	Light industrial buildings	2.000	7	Ø8 / 20x20	10	1,81	0,51
	Medium industrial buildings	5.000	8	Ø8 / 20x20	15	4,26	0,78
	Heavy industrial buildings	10.000	10	Ø10 / 20x20	15	8,33	1,50
52,5 x 52,5	Residential building	500	4	Ø5 / 20x20	5	0,81	0,33
	Public and commercial building	1.000	5	Ø6 / 20x20	5	1,45	0,58
	Light industrial buildings	2.000	7	Ø8 / 20x20	10	2,75	0,59
	Medium industrial buildings	5.000	8	Ø8 / 20x20	15	6,46	0,86
	Heavy industrial buildings	10.000	10	Ø10 / 20x20	15	12,67	1,66
50 x 50	Residential building	500	4	Ø5 / 20x20	5	1,14	0,38
	Public and commercial building	1.000	5	Ø6 / 20x20	5	2,05	0,69
	Light industrial buildings	2.000	7	Ø8 / 20x20	10	3,89	0,65
	Medium industrial buildings	5.000	8	Ø8 / 20x20	15	9,19	0,90
	Heavy industrial buildings	10.000	10	Ø10 / 20x20	15	18,04	1,75

The table expresses, starting from the various examples of overload and of thickness (to be given to the slab), the pressures that would be applied to the feet of the structure, in relation to the (eventual) thicknesses of the lean concrete. The overload hypotheses are indicated in table as an example; the actual load capacity is far superior. To know the exact values or sizing as shown in the project, contact the technical department.

TECHNICAL DATA

IGLU'® SMART H 20 cm

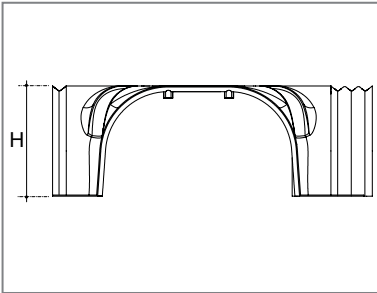
	Dimensions* (formwork position)	cm	55 x 55	52,5 x 52,5	50 x 50
	Quantity of concrete to the crown**	m ³ /m ²	0,037	0,032	0,028
	Piece weight	kg	1,828	1,828	1,828
	Pallet dimensions***	cm	120 x 120 x 248	120 x 120 x 248	120 x 120 x 248
	M ² pallet	m ² /PAL	121	110	100
	Pieces per pallet***	pcs/PAL	400	400	400
	Pallet weight***	kg/PAL	745	745	745

* Recyclable material is allowed a size tolerance of $\pm 1,5\%$.

** The volume may vary depending on the pouring condition and the tolerance of the material.

*** For production necessity the technical data can be change.

DRY ASSEMBLY METHOD

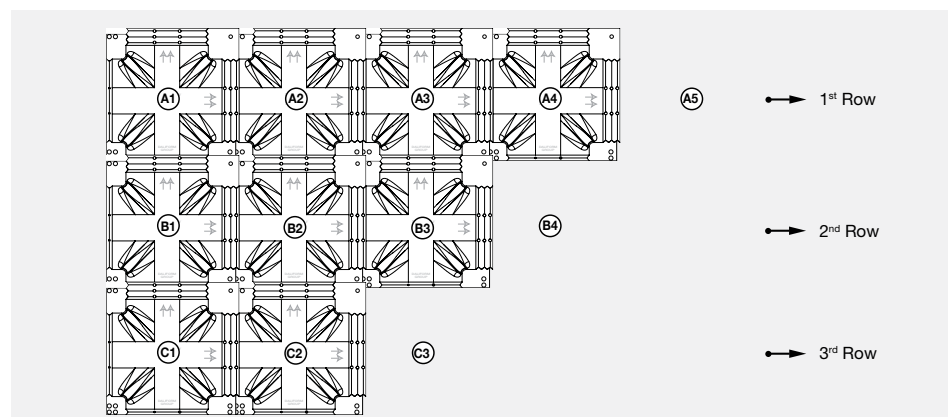

 To ensure a correct installation and perfectly created under-floor cavity please refer to the product's usage requirements.



The Technical Department is available to provide planning support both in the preliminary and in the executive phase to determine the technical characteristics of the structures, the related construction costs and perform comparative analyzes with alternative technical solutions. Upon request, it is also possible to take advantage of technical assistance on site.

Dry-stone time-exposure of IGLU'®: 80 m²/h

TECHNICAL PACKING AND TRUCKING



Pieces for pallet: 400

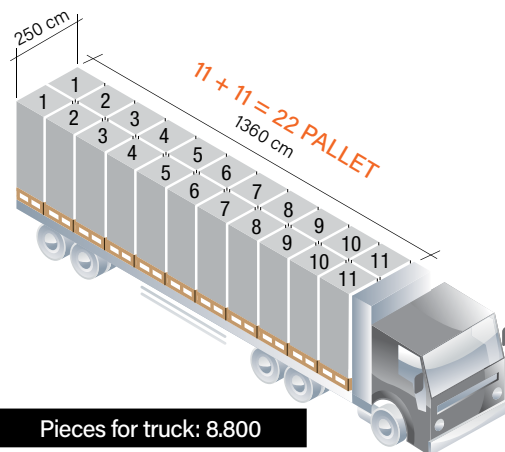

Pieces for truck: 8.800

LABELLING

Each pallet is identified with:



A coloured band containing: the brand, a type image of the product, the Company name, the website and any warnings.	A label with the following informations: product's name and code, quantity, Certificate of the Environmental Compatibility, date of production, shift of production, n° of the worker, production line batch.
--	--



A label with the following informations: product's name and code, quantity, Certificate of the Environmental Compatibility, date of production, shift of production, n° of the worker, production line batch.

CREDITS

- BBA;
- Declaration of Performance Conformity;
- Hygienic certificate;
- Rupture load tests;
- Certificate of Environmental Compatibility (CCA).

The product does not fear the weather and can be stored outside. Take the utmost care to prevent the product from being deformed or overstressed during the unloading, storage and assembly. In case of disposal the product is totally recyclable.

Tel. +39 0422 2083 - Fax +39 0422 800234
export@daliform.com - www.daliform.com
Via Postumia Centro, 49 - 31040
Gorgo al Monticano (TV) - Italy



The information contained in this catalogue could be changed. Please request updated informations from DALIFORM GROUP, which reserves the right to make changes at any moment without notice. In consideration of recycled material, it is specified that there are tolerance margins caused by environmental factors.