




IGLÙ® H 50 cm



Ventilated under-floor cavities for civil and industrial buildings that are being built new or reconstructed. - Urban infrastructure structures: squares, sidewalks, sports facility.

- Creation of an intermediate slab or roofing for cavities used for ventilation and the passage of systems.
- Rooms used for humidity and temperature control: drying cells, cold rooms, greenhouses, storage rooms and cellars.
- Underground pipes for the passage of utilities. Inspectionable cavities and pits.
- By filling it in simply with expanded clay, it can be used to create roof-top gardens.
- Underground ducts for the dispersion of water and for drainage.
- Overhead sidewalks for passenger loading and unloading or the creation of floating floors.
- Levelling height.

Made of ALAPLEN® CP30

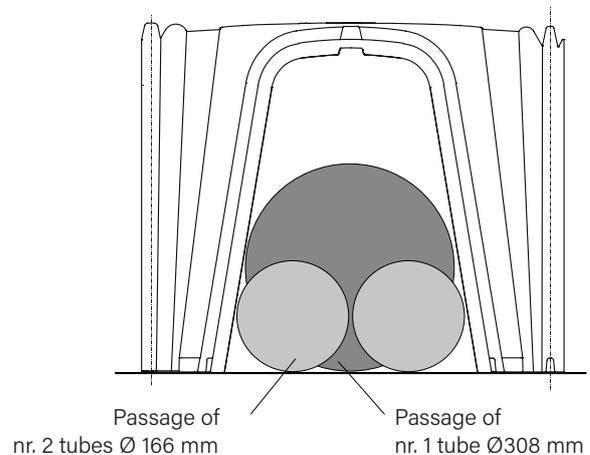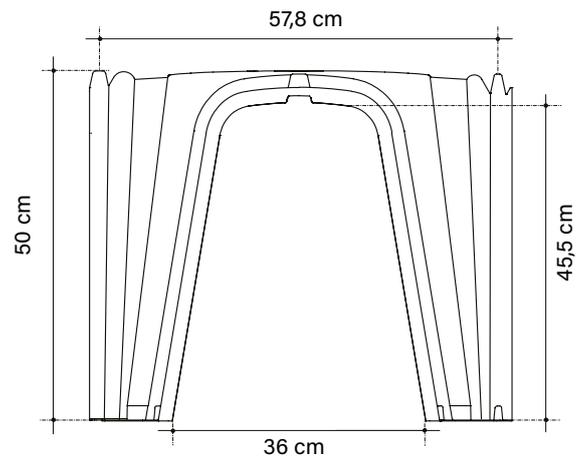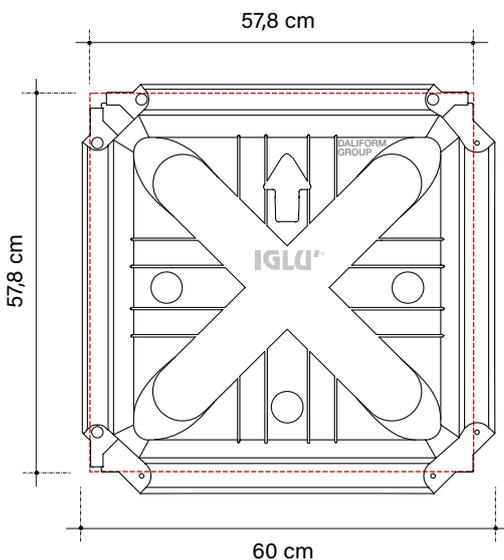

The images are only for examples.
 Recyclable material is allowed a size tolerance of $\pm 1,5\%$.



0,077m³/m² Quantity (of concrete to the crown)

The volume may vary depending on the pouring condition and the tolerance of the material.

PRESSURES AT THE BOTTOM OF THE STRUCTURE

Iglu[®] H 50

Loads ^[1] kN/m ²	Slab cm	Mesh Ø mm Meshcm x cm	Thickness of the lean concrete cm	Pressure at pillar base ^[2] MPa
15	4	Ø 5/ 20 x 20	5	0,193
			10	0,095
			15	0,057
50	5	Ø 8/ 20 x 20	10	0,269
			15	0,158
			20	0,105
100	10	Ø 6/ 20 x 20	20	0,200
			25	0,142
			30	0,106

[1] Characteristic values

[2] Project values (Ultimate SLU Limit State - Coefficients A1)


The table expresses, starting from the various examples of overload and of thickness (to be given to the slab), the pressures that would be applied to the feet of the structure, in relation to the (eventual) thicknesses of the lean concrete. The overload hypotheses are indicated in table as an example; the actual load capacity is far superior.

To know the exact values or sizing as shown in the project, contact the technical department.

The Technical Office is available to provide planning support both in the preliminary and in the executive phase to determine the technical characteristics of the structures, the related construction costs and perform comparative analyzes with alternative technical solutions. Upon request, it is also possible to take advantage of technical assistance on site.

TECHNICAL DATA

Iglu[®] H 50

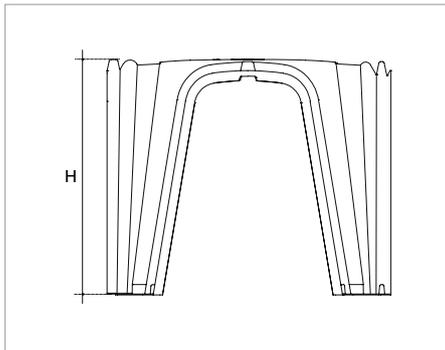


Useful size*	cm	57,8 x 57,8
Height* H	cm	50
Quantity of concrete to the crown**	m ³ /m ²	0,077
Average piece weight	kg	2,552
Pallet dimensions	cm	120 x 120 x 261
M ² pallet	m ² /PAL	80
Pieces per pallet***	pz/PAL	240
Pallet weight***	kg/PAL	627

* Recyclable material is allowed a size tolerance of ± 1,5%.

** The volume may vary depending on the pouring condition and the tolerance of the material.

*** For production necessity the technical data can be change.

DRY ASSEMBLY METHOD

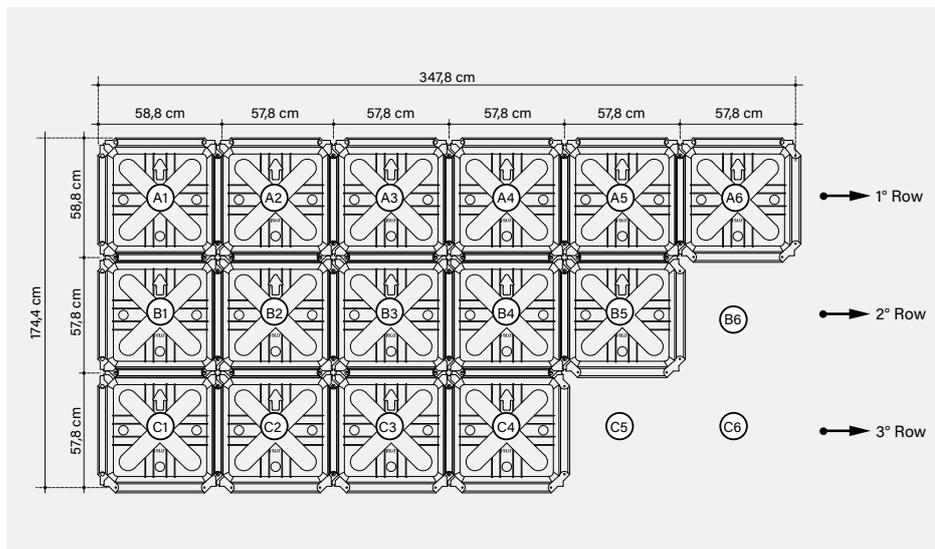

To ensure a correct installation and perfectly created under-floor cavity please refer to the product's usage requirements.


Dry-stone time-exposure: 80 m²/h

TECHNICAL PACKING AND TRUCKING



1 pallet: 4 piles of 60 pieces


Pieces per pallet: 240



(a x b x h)

120 x 120 x 261

measurements are in cm

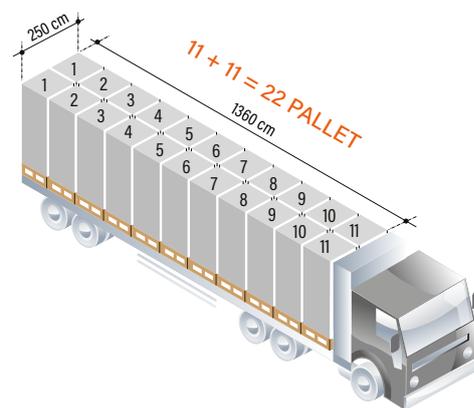

Pieces for truck: 5.280

LABELLING

Each pallet is identified with:



A coloured band containing:
the brand, a type image of the product,
the Company name, the website and
any warnings.



A label with the following informations:
product's name and code, quantity, Certificate
of the Environmental Compatibility, date of
production, shift of production, n° of the worker,
production line batch.


CREDITS

- BBA;
- Declaration of Performance Conformity;
- Hygienic certificate;
- Acoustic check for verification of DIN standards;
- Avis Technique;
- Rupture load tests;
- Productive process monitoring tests;
- Certificate of Environmental Compatibility.

The product does not fear the weather and can be stored outside. Take the utmost care to prevent the product from being deformed or overstressed during the unloading, storage and assembly. In case of disposal the product is totally recyclable.


ACCESSORIES

L-PLAST CASTING STOP




Useful size	cm	205 x 49+7
Thickness	mm	0,40
Average piece weight	kg/pz	1,380
Quantity per package	ml	20

CASTING STOP PIBIStop



Useful size	cm	50+5+5+7
Thickness	mm	0,40
Average piece weight	kg/pz	0,310
Quantity per package	pz	25

PLASTIC EXTENSION



Useful size	cm	41 x 37 x 47
Average piece weight	kg/pz	1,971
Package size	cm	41 x 37 x 119
Quantity per package	pz	25
Pallet dimensions	cm	100 x 120 x 213
	pz/PAL	300
	kg/PAL	611