


Grid for driveway surface with grass finishing

Salvaprato ERBY is a modular plastic grid for outdoors that allows to realize paved driveways with lawn finish, with great aesthetic, functional, ecological and economic advantages.

Salvaprato ERBY is the honeycomb design grid that allows you to create:

access areas for cars and wheeled vehicles, public and private parking areas, bike paths and walking trails, paths for golf courses and sports facilities, pitches (gazebo area, barbecue area, etc.), ornamental gardens, lawn protection, wear protection near recreational areas and in the portion below the benches, consolidation of sloping land to counteract leaching and erosion phenomena, temporary surfaces, on makeshift soils, for various events (fairs, markets, theaters, tent, etc.), removable pitches for caravans, trailers, various storage places, etc., tree trunk surrounding surfaces, helipads and tracks for ultralight aircrafts, lawn surface protection from the damage caused by the liveliness of the animals (dogs, etc.), without danger to them, green roofs, roofing for flat roofs and terraces to protect the waterproofing layer.

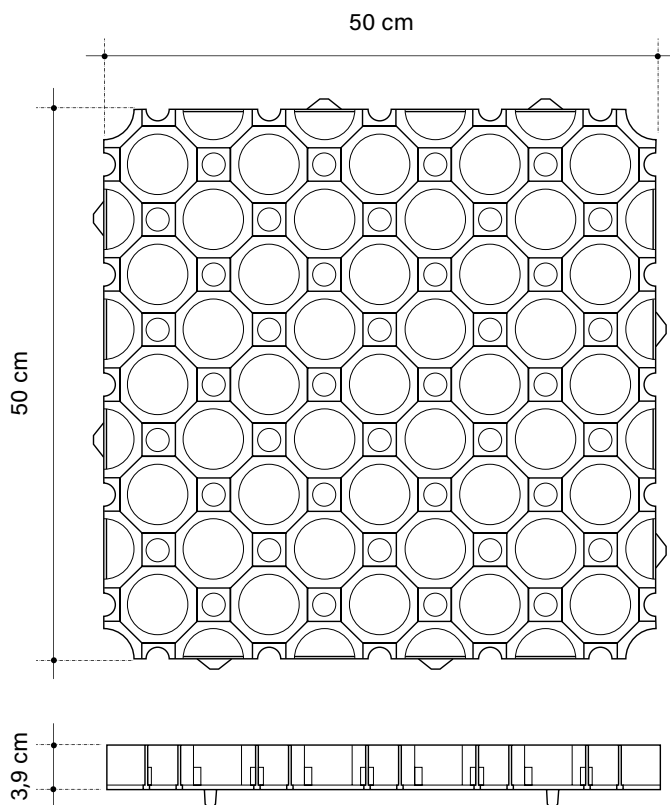

The images are only for examples.
Recyclable material is allowed a size tolerance of $\pm 2,5\%$.


To contact the technical office: Tel. +39 0422 2083 - tecnico@daliform.com

To obtain updated technical cards, support material, new photos and case studies, go to www.daliform.com

The technical consultancy is only valid for the Daliform Group construction systems.

TECHNICAL DATA

ERBY Salvaprato

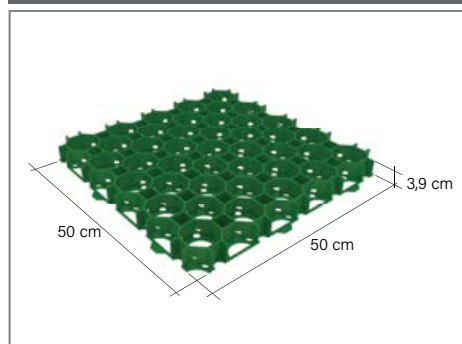

Working dimensions*	cm	50 x 50 x 3,9 h
Pieces per m ²	pcs	4
Average piece weight	kg/pcs	1,365
Bearing capacity	t/m ²	> 210
Colour*	-	green
Pallet dimensions	cm	100 x 120 x 218 h
Pallet m ²	sq.mt./PAL	60
Pallet pieces	pcs/PAL	240
Pallet weight	kg/PAL	336


* In consideration of the recycled material, it is permitted a size variation of 2.5%, for the same reason the colour tone is subject to variation.

Material: Mixture of thermoplastic resin 100% made from recycled plastic, UV-stabilized;

Modularity: Male female interlocking hooking system and claw retainers;

Accessories: White, yellow, blue signaling elements for viability and/or to separate car parking areas. Anchoring pickets at high depth for high steep terrain.

ASSEMBLY OF ERBY SALVAPRATO

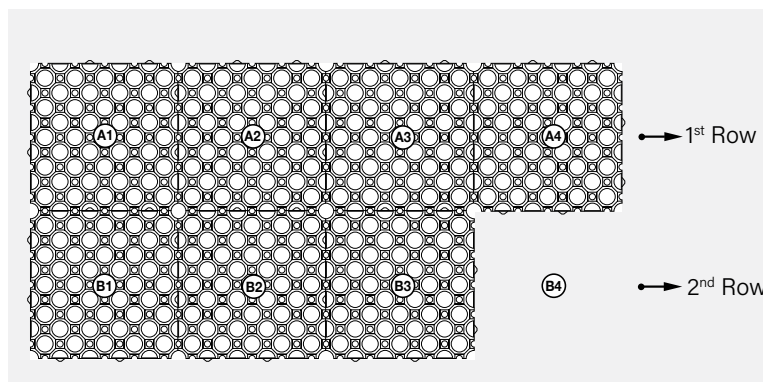

Due to the light weight of each single element laying is possible with the aid of machinery. If it becomes necessary to adapt and shape the module, ERBY Salvaprato may be cut directly on site with the tools commonly used in such cases.

1. Face all the gratings in the same way, with the female hook in the upper left-hand corner;
2. The first grating is placed in the upper left-hand corner of the surface in need of flooring;
3. Proceed with the assembly of the various gratings according to the direction that is normally used for writing: from left to right and downward from above.

In case of slopes it is important to consider the adherence coefficient. For this reason, assuming prudentially a wet surface and tires and medium/high use status, it is not recommended to use ERBY Salvaprato for inclinations greater than 8%. Adherence can be improved by inserting joists in stone material.

ACCESSORIES

SIGNALLING ELEMENTS



Top diameter	Ø cm	8
Soil penetration	cm	10
Color	-	blue, yellow, white
Pieces per box	pcs	450
Weight box	kg	1
Pieces per pallet	pcs	13.500
Pallet dimensions	cm	120 x 120 x 255 h
Pallet weight	kg	45

ANCHORAGE STAKE




Soil penetration	cm	30
Color	-	brown
Pieces per box	pcs	600
Weight box	kg	22
Pieces per pallet	pcs	18.000
Pallet dimensions	cm	120 x 120 x 255 h
Pallet weight	kg	680

PACKING AND TRUCKING



1 pallet: 4 piles of 60 pieces

Pieces for pallet: 240

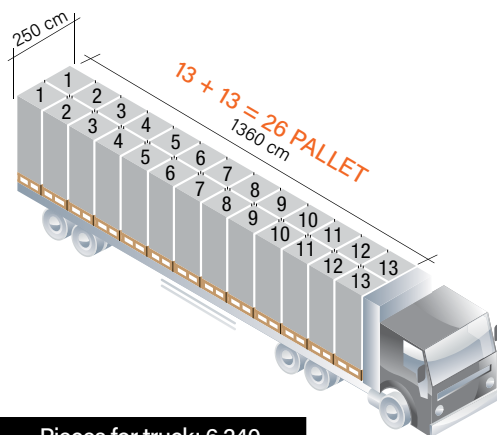

Pieces for truck: 6.240

LABELLING

Each pallet is identified with:



A coloured band containing:
the brand, a type image of the product,
the Company name, the website and
any warnings.



A label with the following informations: product's
name and code, quantity, Certificate of the
Environmental Compatibility, date of production, shift
of production, n° of the worker, production line batch.

The product does not fear the weather and can be stored outside. In case of disposal the product is totally recyclable.